

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number
WO 01/04938 A1(51) International Patent Classification: H01L 21/027,
21/308, 21/311, 21/321#11-39, Singapore 650233 (SG). COTTERELL, Brian
[GB/SG]; 55 Lorong Sarhad, Singapore 119166 (SG).

(21) International Application Number: PCT/SG99/00074

(74) Agent: MCCALLUM, Graeme, David; Lloyd Wise, Tan-
jong Pagar, P.O. Box 636, Singapore 910816 (SG).

(22) International Filing Date: 9 July 1999 (09.07.1999)

(25) Filing Language: English

(81) Designated States (national): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE,
ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG,
MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE,
SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN,
YU, ZA, ZW.

(26) Publication Language: English

(71) Applicants (for all designated States except US): INSTI-
TUTE OF MATERIALS RESEARCH & ENGINEER-
ING [SG/SG]; Blk S7 Level 3 Kent Ridge Crescent, Sin-
gapore 119260 (SG). OSRAM OPTO SEMICONDUCTOR
GMBH & CO. OHG [DE/DE]; Wernerwerkstrasse
2, D-93049 Regensburg (DE).(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM,
AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT,
BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): GUENTHER,
Ewald, Karl, Michael [DE/SG]; 991 Bukit Timah Road,
#03-11 Maplewoods, Singapore 589630 (SG). CHEN,
Zhong [CN/SG]; Blk 233 Bukit Batok East Avenue 5,

Published:

— With international search report.

[Continued on next page]

(54) Title: MECHANICAL PATTERNING OF A DEVICE LAYER

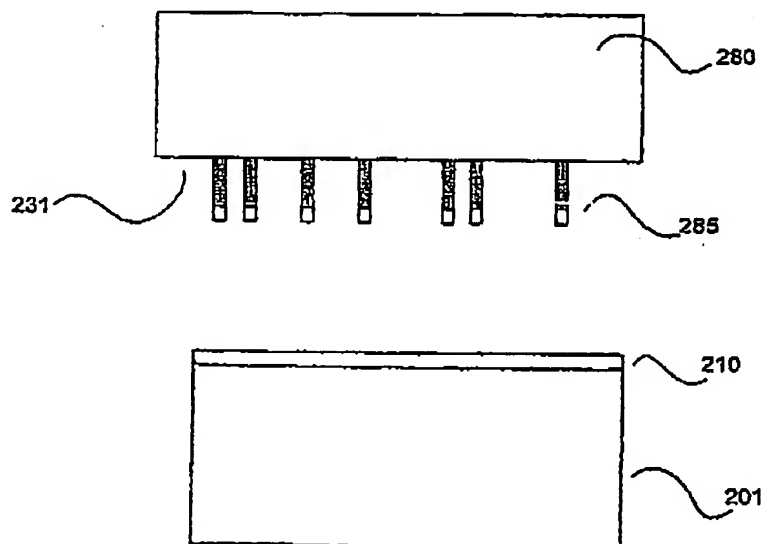

(57) Abstract: A method of fabricating a device comprising mechanically patterning a device layer using a stamp containing the desired pattern. The device layer is formed on a plastic or polymeric substrate. The stamp is pressed against the substrate under a load which patterns the device layer without cracking it in the non-patterned areas.

BEST AVAILABLE COPY

WO 01/04938 A1

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 01/04938

PCT/SG99/00074

1

MECHANICAL PATTERNING OF A DEVICE LAYER**Field of the Invention**

The present invention relates to the fabrication of
5 devices. More particularly, the invention relates to
patterning of a device layer on a substrate.

Background of the Invention

In device fabrication, one or more device layers
10 are formed on a substrate. The layers are sequentially
deposited and patterned to create features on the
surface of the substrate. The layers can be patterned
individually and/or as a combination of layers to form
the desired features. The features serve as components
15 that perform the desired functions, creating the device.

One type of device which is of particular interest
is a light emitting diode (LED). Typically, an LED cell
or pixel comprises one or more functional layers
sandwiched between two electrodes to form a functional
20 stack. Charge carriers are injected from both
electrodes. These charge carriers recombine in the
functional layer or layers, causing visible radiation to
emit. Recently, significant advances have been made
utilizing organic functional layers to form organic LEDs

WO 01/04938

PCT/SG99/00074

2

(OLEDs). Such devices are fabricated on rigid glass substrates having a thickness of about 0.3-1.1 mm.

Typically, OLED devices comprises a plurality of OLED pixels arranged to form a display, such as a flat panel display (FPD). A pixelated OLED device includes, for example, a plurality of first electrode strips formed on the substrate. The strips are arranged in a first direction. One or more organic layers are formed on the first electrodes strips. A plurality of second electrode strips is formed over the organic layers in a second direction. Typically, the first and second electrode strips are orthogonal to each other. The intersections of the first and second electrode strips form LED pixels.

The first electrode strips are created on the substrate by patterning an electrode layer. Conventionally, the electrode layer is patterned by photolithographic and etch processes. For example, a photosensitive resist layer is deposited on the electrode. The resist layer is exposed with radiation having the desired pattern defined by a mask. After development, unwanted resist is removed to expose portions of the electrode beneath. The exposed portions are removed by a wet etch, leaving the desired pattern

WO 01/04938

PCT/SG99/00074

3

on the electrode layer. Thus, conventional techniques for patterning the electrode require numerous steps, increasing raw process time and manufacturing cost.

As evidenced by the above discussion, it is
5 desirable to provide a simplified process of patterning a device layer.

Summary of the Invention

The invention relates to patterning a device layer
10 on a substrate during device fabrication. In accordance with the invention, the patterning of the device layer is achieved using a stamp with a pattern thereon. The pattern is formed by protrusions having a height greater than the thickness of the device layer to pattern the
15 device layer. The stamp is pressed against the surface of the substrate under a load which patterns the device layer. The load is selected to precisely control cracking the edges of the patterned areas but without cracking the non-patterned areas.

20

Brief Description of the Drawings

Fig. 1 shows an organic pixel LED;

WO 01/04938

PCT/SG99/00074

4

Figs. 2-4 show a process for patterning a device layer in accordance with one embodiment of the invention; and

Fig. 5 shows an alternative process for patterning a device layer.

Preferred Embodiments of the Invention

The invention relates generally to the fabrication of devices. In particular, the invention describes a process for patterning a device layer on a substrate, particularly a device layer formed on a ductile or flexible substrate. Various types of devices can be formed by the present invention. For example, electrical, mechanical, or electromechanical devices can be formed. Also, the invention can be useful in fabricating a microelectromechanical system (MEMS). In one embodiment, a process for forming a pixelated organic LED device is provided.

Fig. 1 shows a cross-section of an OLED pixel. As shown, a substrate 101 is provided. The substrate provides support for the LED pixel. A functional stack 105 comprising of one or more organic functional layers 120 formed between conductive layers 110 and 150 is formed on the substrate, creating the LED pixel. The

WO 01/04938

PCT/SG99/00074

5

conductive layer 110 serves as an anode and the
conductive layer 150 serves as a cathode.

A plurality of LED pixels can be arranged on the
substrate to form an FPD. The FPD is used in various
5 consumer electronic products, including cellular phones,
cellular smart phones, personal organizers, pagers,
advertising panel, touch screen displays,
teleconferencing equipment, multimedia equipment,
virtual reality products, and display kiosks.

10 Figs. 2-5 show a process for patterning a device
layer on a substrate in the fabrication of a device. In
one embodiment, the device fabricated comprises a
pixelated OLED device. Forming other types of devices
such as electrical and/or mechanical devices, including
15 sensor arrays, is also useful.

Referring to Fig. 2, a substrate 201 is provided on
which the active components of the device are formed.
The substrate comprises a plastic or a polymeric
material. In one embodiment, the substrate comprises a
20 flexible substrate, such as poly(ethylene terephthalate)
(PET) or polyester for forming flexible devices. The
substrate can comprise a transparent substrate to serve
as, for example, a display surface for an OLED display.
The use of a flexible transparent substrate for forming

WO 01/04938

PCT/SG99/00074

6

a flexible display is also useful. Various types of plastic substrates, such as PET, poly(butylene terephthalate) (PBT), poly(ethylene naphthalate) (PEN), Polycarbonate (PC), polyimides (PI), polysulfones (PSO),
5 and poly(*p*-phenylene ether sulfone) (PES) are useful. Other substrates comprising polyethylene (PE), polypropylene (PP), poly(vinyl chloride) (PVC), polystyrene (PS) and poly(methyl methacrylate) (PMMA), can also be used.

10 In one embodiment, the substrate should be thin to result in a thin device while providing sufficient mechanical integrity during the fabrication process to support the active components. Preferably, the substrate should be as thin as possible while providing
15 sufficient mechanical integrity during the fabrication process. The substrate thickness is, for example, about 20 - 200 μm . Thicker substrates are also useful. For example, thicker substrate, can be used where device thickness or flexibility is not an issue.

20 A device layer 210 is formed on the substrate. The device layer comprises, for example, a conductive layer. Other types of device layers, such as dielectrics or semiconductors, are also useful. In one embodiment the device layer comprises a transparent

WO 01/04938

PCT/SG99/00074

7

conductive layer that serves as an electrode for an LED device. The transparent conductive layer comprises an indium-tin-oxide (ITO). ITO is useful in forming the transparent anode of the LED device. Other transparent
5 conductive layers, including zinc-oxide or indium-zinc-oxide are also useful. Various techniques, such as sputtering, physical vapor deposition (PVD), chemical vapor deposition (CVD) or plasma enhanced CVD (PECVD) can be employed to form the device layer. The device
10 layer is deposited on the substrate to a thickness of about, for example, 100 nm. The thickness, of course, can vary depending on design requirements.

A stamp 280 comprising a desired pattern on a surface 231 is provided. The pattern is define by
15 protrusions 285 on surface 231. The stamp is made of a hard material such as steel, silicon, or ceramic. Other materials that are sufficiently hard can also be used to form the stamp.

In one embodiment, the pattern is deeper than the
20 thickness of the device layer. This ensures proper patterning of the device layer. However, the height of the protrusions should be less than that which would compromise the support function of the substrate. In one embodiment, the height of the protrusions is at

WO 01/04938

PCT/SG99/00074

8

least about 2 - 10 times the thickness of the device layer, preferably 5 - 10 times the thickness of the device layer. For example, the height of the protrusions is about 0.5 - 1 μ m for a 100 nm thick device layer. The height of the protrusions can be optimized according to the mechanical properties and thickness of the substrate.

Referring to Fig. 3, a load is applied on the stamp 280, forcing the stamp against the substrate 201. This causes the pattern on the stamp to be transferred to the substrate. The load applied on the stamp is sufficient to prevent the device layer 210 from cracking in the active or non-patterned areas as it is patterned. In one embodiment, the net pressure of the load is about 200 - 400 MPa for a typical polymer substrate. In general, the required net pressure should exceed about 1.1 times the yield strength of the substrate material.

Referring to Fig. 4, the stamp is lifted from the substrate. As shown, the pattern on the stamp is transferred onto the device layer. In one embodiment, the device layer is patterned to form electrode strips on the substrate. Conventional processing continues to form the device.

WO 01/04938

PCT/SG99/00074

9

In one embodiment, the process continues to fabricate OLED pixels of an OLED device. Fabrication of OLED pixels is described in, for example, United States Patent 4,720,432 and Burroughes et. al, Nature 347 (1990) 539, which are herein incorporated by reference for all purposes. This includes, for example, depositing one or more organic functional layers, such as conjugated polymer or Alq₃, on the electrode. Other types of organic layers can also be useful. Preferably, a plurality of functional layers is formed on the electrode. Second electrode strips comprising metal such as aluminum or other conductive material are formed over the functional layer. The second electrode strips are typically orthogonal to the bottom electrode strips. Providing second electrode strips that are diagonal to the bottom electrode strips is also useful. The intersections of the top and bottom electrode strips form OLED pixels. Various techniques can be used to form the electrode strips. For example, the second electrode strips can be formed by selective deposition techniques. Alternatively, the electrode strip can be formed by selectively patterning a top electrode layer to form the strips.

WO 01/04938

PCT/SG99/00974

10

In an alternative embodiment, the pattern on the stamp can be formed to include a plurality of devices for parallel processing, thereby decreasing process time per device. The stamp pattern can be formed by a
5 variety of techniques. Such techniques include, for example, grinding or photolithographic and etch processes.

Fig. 5 shows another embodiment of the invention. As shown, a stamp comprising a drum 580 with the desired
10 pattern 585 thereon is provided. The drum stamp is used in reel-to-reel processing. A long flexible substrate 501 with a device layer 510 formed thereon is provided. The substrate is translated through the drum while it is pressed under rotation, patterning the device layer. As
15 shown, the substrate is translated in a direction from right to left and the drum stamp is rotated in the clockwise direction. Reversing the direction that the substrate is translated is also useful. Reel-to-reel processing enables parallel processing of devices.

20 While the invention has been particularly shown and described with reference to various embodiments, it will be recognized by those skilled in the art that modifications and changes may be made to the present invention without departing from the spirit and scope

WO 01/04938

PCT/SG99/00074

11

thereof. The scope of the invention should therefore be determined not with reference to the above description but with reference to the appended claims along with their full scope of equivalents.

.5

WO 01/04938

PCT/SG99/00074

12

What is claimed is:

1. In the fabrication of a device, a method of patterning a device layer comprising:

providing a substrate comprising the device layer
5 on its surface; and

patterning the device layer by pressing a stamp comprising a pattern against the substrate.

2. The method of claim 1 wherein the device comprises
10 an organic LED device.

3. The method of claim 2 wherein the substrate comprises a polymeric substrate.

15 4. The method of claim 3 wherein the substrate comprises a flexible or ductile substrate.

5. The method of claim 4 wherein the substrate comprises a transparent substrate.

20

6. The method of claim 5 wherein the device layer comprises a transparent conductive layer.

WO 01/04938

PCT/SG99/00074

13

7. The method of claim 6 wherein the transparent conductive layer comprises a conductive oxide.

8. The method of claim wherein 7 conductive oxide.
5 comprises indium-tin-oxide.

9. The method of claim 8 wherein the pattern is produced by protrusions on a surface of the stamp.

10 10. The method of claim 9 wherein patterning the device layer forms lower electrodes on the substrate.

11. The method of claim 10 wherein the protrusions comprise a height greater than a thickness of the device
15 layer.

12. The method of claim 11 wherein the height of the protrusions is at least about 2 - 10 times greater than the thickness of the device layer.

20

13. The method of claim 12 wherein the stamp is pressed against the substrate surface under a load without causing the device layer to crack in non-patterned areas.

WO 01/04938

PCT/SG99/00074

14

14. The method of claim 13 wherein the load comprises a net pressure of greater than about 1.10 times a yield strength of the substrate.

5

15. The method of claim 14 further comprises processing to form OLED pixels.

16. The method of claim 15 wherein the processing to
10 form OLED pixels comprises:

forming at least one organic functional layer on lower electrodes; and

forming upper electrodes on the organic functional layer, wherein OLED pixels are formed where upper and
15 lower electrodes sandwich the organic functional layer.

17. The method of claim 3 wherein the substrate comprises a transparent substrate.

20 18. The method of claim 17 wherein the device layer comprises a transparent conductive layer.

19. The method of claim 18 wherein the pattern is produced by protrusions on a surface of the stamp.

WO 01/04938

PCT/SG99/00074

15

20. The method of claim 19 wherein patterning the device layer forms lower electrodes on the substrate.

5 21. The method of claim 20 wherein the protrusions comprise a height greater than a thickness of the device layer.

22. The method of claim 21 wherein the stamp is pressed
10 against the substrate surface under a load without causing the device layer to crack in non-patterned areas.

23. The method of claim 22 further comprises processing
15 to form OLED pixels.

24. The method of claim 23 wherein the processing to form OLED pixels comprises:

forming at least one organic functional layer on
20 lower electrodes; and

forming upper electrodes on the organic functional layer, wherein OLED pixels are formed where upper and lower electrodes sandwich the organic functional layer.

WO 01/04938

PCT/SG99/00074

16

25. The method of claim 3 wherein the device layer comprises a conductive layer.

26. The method of claim 25 wherein the pattern is
5 produced by protrusions on a surface of the stamp.

27. The method of claim 26 wherein patterning the device layer forms lower electrodes on the substrate.

10 28. The method of claim 27 wherein the protrusions comprise a height greater than a thickness of the device layer.

29. The method of claim 28 wherein the stamp is pressed
15 against the substrate surface under a load without causing the device layer to crack in non-patterned areas.

30. The method of claim 29 further comprises processing
20 to form OLED pixels.

31. The method of claim 30 wherein the processing to form OLED pixels comprises:

WO 01/04938

PCT/SG99/00074

17

forming at least one organic functional layer on lower electrodes; and

forming upper electrodes on the organic functional layer, wherein OLED pixels are formed where upper and
5 lower electrodes sandwich the organic functional layer.

32. The method of claim 2 wherein the substrate comprises a material selected from the group consisting of polyester, poly(ethylene terephthalate),
10 poly(butylene terephthalate), poly(enthylene naphthalate), polyethylenesterephthalate, polycarbonate, polyimides, polysulfones, poly(p-phenylene ether sulfone), polyethylene, polypropylene, poly(vinyl chloride), polystyrene, and poly(methyl
15 methyleacrylate).

33. The method of claim 32 wherein the device layer comprises a conductive layer.

20

34. The method of claim 33 wherein the pattern is produced by protrusions on a surface of the stamp, the pattern is used to form lower electrodes on the substrate.

25

WO 01/04938

PCT/SG99/00074

18

35. The method of claim 34 wherein the protrusions comprise a height greater than a thickness of the device layer to pattern the device layer.

5 36. The method of claim 35 wherein the stamp is pressed against the substrate surface under a load without causing the device layer to crack in non-patterned areas.

10 37. The method of claim 36 further comprises processing to form OLED pixels comprising:

forming at least one organic functional layer on lower electrodes; and

forming upper electrodes on the organic functional
15 layer, wherein OLED pixels are formed where upper and lower electrodes sandwich the organic functional layer.

38. The method of claim 1 wherein the substrate comprises a polymeric substrate.

20

39. The method of claim 38 wherein the pattern is produced by protrusions on a surface of the stamp.

WO 01/04938

PCT/SG99/00074

19

40. The method of claim 39 wherein the protrusions comprise a height greater than a thickness of the device layer.

5 41. The method of claim 40 wherein the height of the protrusions is at least about 5-10 times greater than the thickness of the device layer.

42. The method of claim 41 wherein the stamp is pressed
10 against the substrate surface under a load without causing the device layer to crack in non-patterned areas.

43. The method of claim 42 wherein the load comprises a
15 net pressure of greater than about 1.1 times a yield strength of the substrate.

44. The method of claim 43 further comprises processing to form the device.

20

45. The method of claim 44 wherein the device comprises a device selected from the group consisting of an electrical device, a mechanical device, a

WO 01/04938

PCT/SG99/00074

20

electromechanical device, and a microelectromechanical system.

46. The method of claim 40 wherein the stamp is pressed
5 against the substrate surface under a load without causing the device layer to crack in non-patterned areas.

47. The method of claim 46 further comprises processing
10 to form the device.

48. The method of claim 47 wherein the device comprises a device selected from the group consisting of an electrical device, a mechanical device, a
15 electromechanical device, and a microelectromechanical system.

49. The method of claim 1 wherein the substrate comprises a material selected from the group consisting
20 of polyester, poly(ethylene terephthalate), poly(butylene terephthalate), poly(enthylene naphthalate), polyethylenesterephthalate, polycarbonate, polyimides, polysulfones, poly(p-phenylene ether sulfone), polyethylene, polypropylene, poly(vinyl

WO 01/04938

PCT/SG99/00074

21

chloride), polystyrene, and poly(methyl methyleacrylate).

5 50. The method of claim 49 wherein the pattern is produced by protrusions on a surface of the stamp.

51. The method of claim 50 wherein the protrusions comprise a height greater than a thickness of the device
10 layer to pattern the device layer.

52. The method of claim 51 wherein the stamp is pressed against the substrate surface under a load without causing the device layer to crack in non-patterned
15 areas.

53. The method of claim 52 further comprises processing to form the device.

20 54. A method of patterning comprising:
rotating a stamp comprising a drum with a pattern;
and
translating a substrate with a device layer thereon as the stamp is rotated to pattern the device.

25

WO 01/04938

PCT/SG99/00074

22

55. The method of claim 1 wherein the substrate comprises a polymeric substrate.

56. The method of claim 55 wherein the pattern is
5 produced by protrusions on a surface of the stamp.

57. The method of claim 56 wherein the protrusions comprise a height greater than a thickness of the device layer to pattern the device layer.

10

58. The method of claim 57 wherein the stamp is pressed against the substrate surface under a load without causing the device layer to crack in non-patterned areas.

15

59. The method of claim 58 further comprises processing to form the device.

60. The method of claim 59 wherein the device comprises
20 a device selected from the group consisting of an electrical device, a mechanical device, a electromechanical device, and a microelectromechanical system.

WO 01/04938

PCT/SG99/00074

23

61. The method of claim 59 wherein the device comprises
an OLED device.

5

WO 01/04938

1 / 5

PCT/SG99/00074

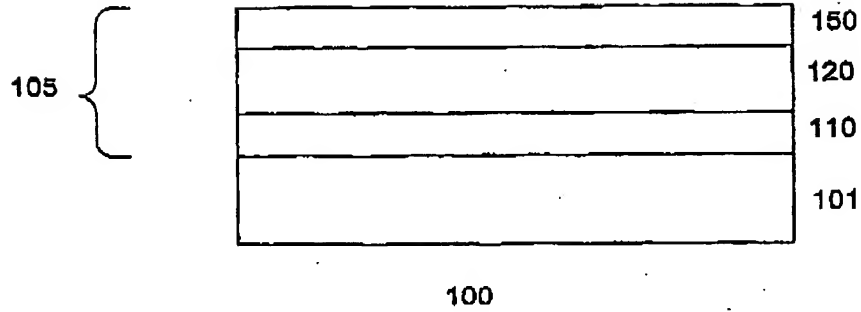


Fig. 1

WO 01/04938

2 / 5

PCT/SG99/00074

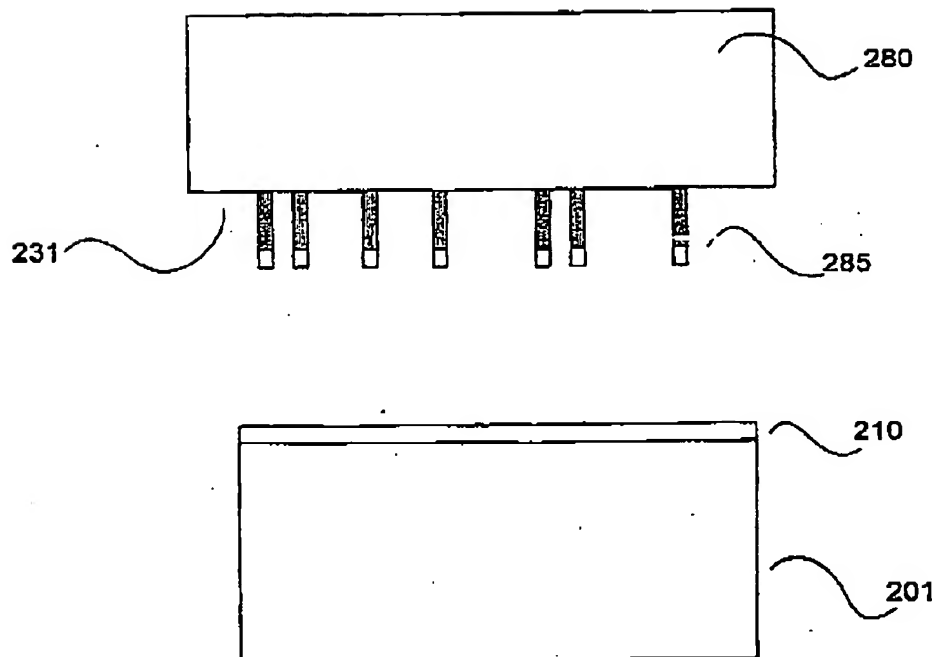


Fig. 2

WO 01/04938

3 / 5

PCT/SG99/00074

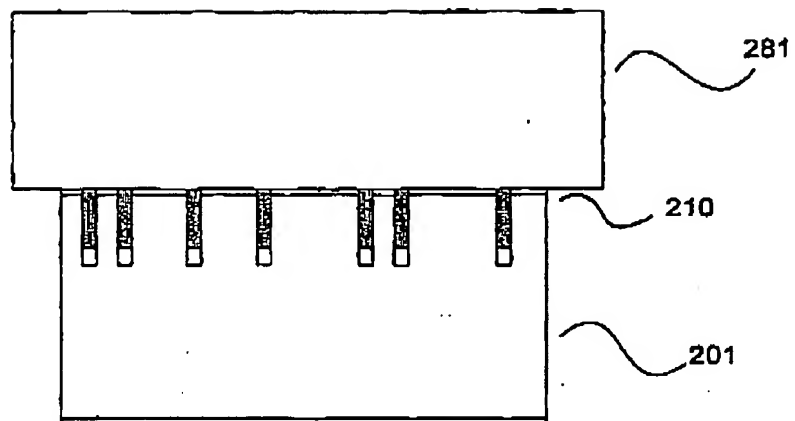


Fig. 3

WO 01/04938

4 / 5

PCT/SG99/00074

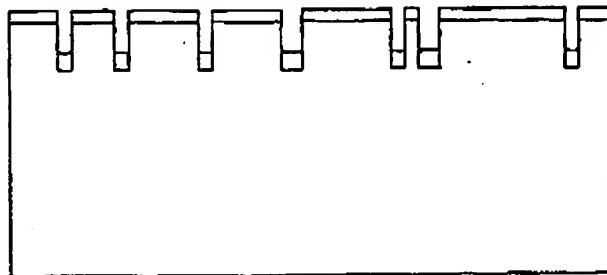


Fig. 4

WO 01/04938

5 / 5

PCT/SG99/00074

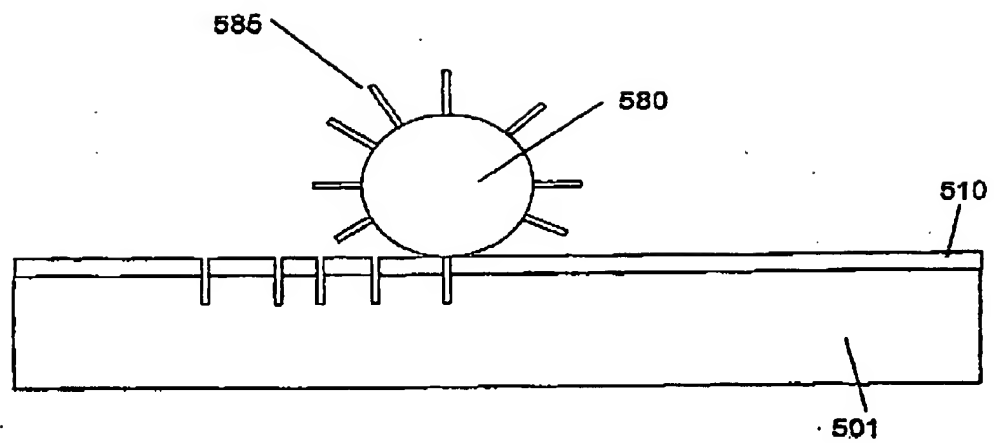


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SG 99/00074

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁷: H01L 21/027; 21/308; 21/311; 21/321

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷: H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, PAJ, EPODOC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-------------|---|-------------------------|
| X Y A | US5669303 A (MARACAS et al.) 23 September 1997 (23.09.97) abstract, fig.1,2,3,11; claim 1. | 1 2,3 4-53; 55-61 |
| Y A | GB 2332985 A (PIONEER) 07 July 1999 (07.07.99), abstract. | 2,3 4-52; 55-61 |
| X X | US 5259926 A (KUWABARA) 09 November 1993 (09.11.93) abstract, fig. 1-4, claims 1, 14-26. | 1,54 |
| A | WO 97/06012 A1 (IBMC) 20 February 1997 (20.02.97) abstract, fig. 1,2,3. | 1, 54 |

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- „A“ document defining the general state of the art which is not considered to be of particular relevance
- „E“ earlier application or patent but published on or after the international filing date
- „L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- „O“ document referring to an oral disclosure, use, exhibition or other means
- „P“ document published prior to the international filing date but later than the priority date claimed

- „T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- „X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- „Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- „&“ document member of the same patent family

Date of the actual completion of the international search

09 May 2000 (09.05.00)

Date of mailing of the international search report

20 June 2000 (20.06.00)

Name and mailing address of the ISA/AT
Austrian Patent Office
Kohlmarkt 8-10; A-1014 Vienna
Facsimile No. 1/53424/200

Authorized officer

Mayer

Telephone No. 1/53424/452

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SG 99/00074

| Patent document cited in search report | | | Publication date | Patent family member(s) | | | Publication date |
|---|----|---------|---------------------|----------------------------|----|----------|---------------------|
| US | A | 5669303 | 23-09-1997 | EP | A1 | 794016 | 10-09-1997 |
| | | | | JP | A2 | 9240125 | 16-09-1997 |
| GB | A1 | 2332985 | 07-07-1999 | GB | A0 | 9828870 | 17-02-1999 |
| | | | | JP | A2 | 11195491 | 21-07-1999 |
| US | A | 9259926 | 09-11-1993 | JP | A2 | 5080530 | 02-04-1993 |
| WO | A1 | 9706012 | 20-02-1997 | EP | A1 | 784542 | 23-07-1997 |
| | | | | JP | T2 | 9511710 | 25-11-1997 |
| | | | | US | A | 5817242 | 06-10-1998 |

PCT/ISA/210 (patent family annex) (July 1998)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.